

Telehandler

MVT3007




6.7m **3200kg**
Working height Rated capacity

MAVERICK
7200 White
St. Fort Worth TX 76135
United States

+1 786.340.6550
www.maverickmth.com

Load Chart

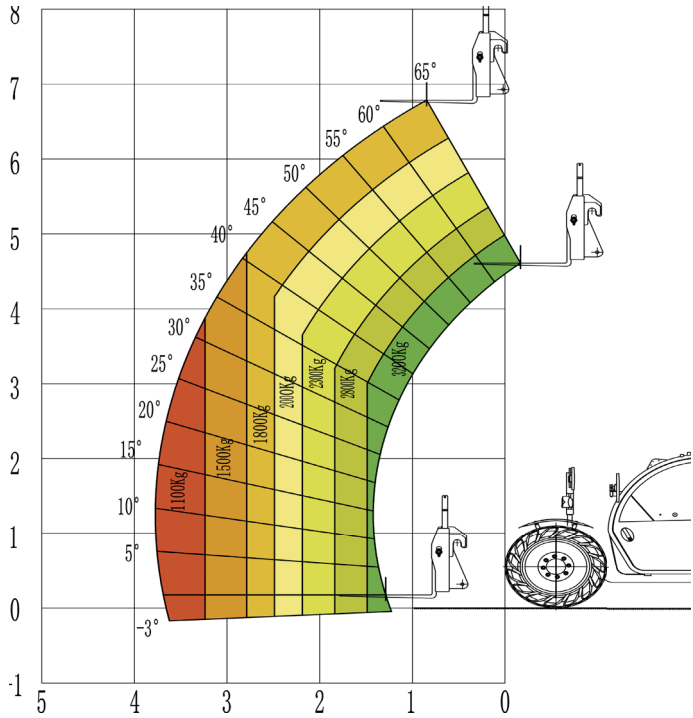

Machine Parameters

MODELS		MVT3007
Machine Parameters	Metric	Imperial
Max. Lift Capacity	3,200kg	7,054.79lbs
Max. Lift Height	6,700mm	21.98ft
Max. Outreach at Max Height	850mm	2.79ft
Max. Working Distance	3,680mm	12.07ft
Weight	6,500kg	14,330.05lbs
Ground Clearance	330mm	1.08ft
Min. Turning radius	3,800mm	12.47ft
Driving Speed	35km/h	21.75mph
Grade Ability	45%	
Power System		
Power Source	Kubota	
Emissionstander	Euro V	
Rated power	55kW	73.76hp
Max. Torque	265Nm/1500rpm	195.45lb.ft/1500rpm
Driving System		
Driving mode	Hydrostatic Drive	
Driving	4x4	
Steering Mode	2ws, Crab Steer, 4ws	
Tires	405/70-20PR-TL	
Tank Capacity		
Fuel Tank Capacity	100L	26.42gal
Hydraulic Oil Capacity	90L	23.78gal

Various replaceable attachment

- Installation of attachment adopts quick change mode,which can quicklys witch attachments to achieve the operation requirements of different functions.

