

Rotating Telehandlers MAVERICK


MAVERICK

7200 White St. Fort Worth TX 76135 United States


Load Chart

MVRT5018

Outrigger Up 🛚

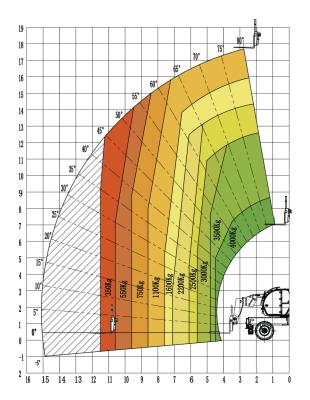


Outrigger Down 🛛

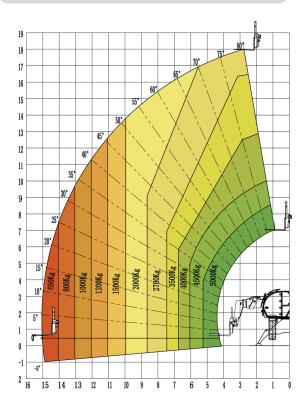


MVRT6025

Outrigger Down []

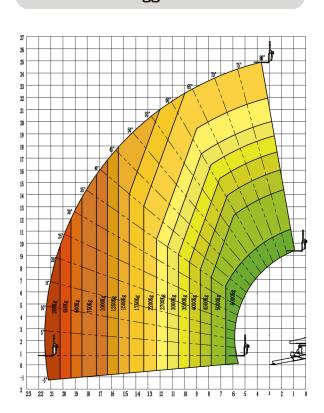

Outrigger Up 🛚

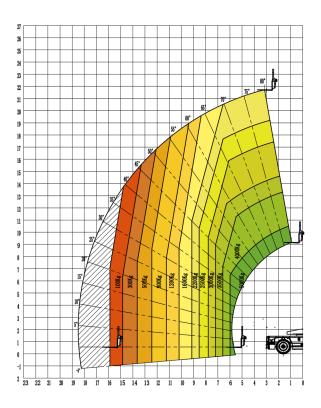



Machine Parameters

		MODEL MVRT 5018		
System	Measurements	Metric		
Machine Parameters	Max. Lift Capacity	5000kg	11,023.11lbs	
	Max, Lift Height	17800mm	58.40 ft	
	Overall Length	6,050/7,450mm	19.85/24.44 ft	
	Overall Width	2,500mm	8.20 ft	
	Overall Height	3100mm	10.17 ft	
	Max. Outreach at Max Height	2750mm	9.02 ft	
	Max. Working Distance	15100mm	49.54 ft	
	Weight	14500kg	31967.03 lbs	
	Ground Clearance	330mm	1.08 ft	
	Min. Turning radius	4200mm	13.78 ft	
	Driving Speed	35km/h	21.75 mph	
	Grade Ability	40%		
Power System	Power Source	Cummins F 3.8		
	Emission standar	Euro V		
	Rated power	90kW		
	Max. Torque	500N m/1,500r p m		
Driving System	Driving mode	Hydrostatic Drive		
	Driving Steering	4x4		
	Mode	2ws, Crab Steer, 4ws		
	Tires	445/65-22.5	/ 405/70-24	
	Fuel Tank Capacity	150L	39.63gal	
Tank Capacity	Hydraulic Oil Capacity	180L	47.55gal	
	Engine	Cummins		
	Axle	Carraro		
Keyparts Configuration	Hydraulic pump	Hengli/Inline		
	Hydraulic System	Husco		
	Cab	Closed, AC, LED lights		
	Attachment	121.92cm Fork	48in Fork	



Machine Parameters

		MODEL MVRT 6025		
System	Measurements	Metric		
Machine Parameters	Max. Lift Capacity Max,	6,000kg	13,227.74lbs	
	Lift Height	24,700mm	81.04ft	
	Overall Length	7,955/9,360mm	26.1/30.71ft	
	Overall Width	2,500mm	8 .2 ft	
	Overall Height	3,150mm	10.33ft	
	Max. Outreach at Max Height	-		
	Max. Working Distance	21,290mm	69.85ft	
	Weight	20,150kg	44,423.15lbs	
	Ground Clearance Min.	400mm	1.31ft	
	Turning radius	4,400mm	14.44ft	
	Driving Speed	35km/h	21.75mp h	
	Gradeability	35%		
Power System	Power Source	Cummins F 3.8		
	Emission standar	Euro V		
	Rated power Max.	115kW		
	Torque	620N m/1,500r p m		
	Driving mode	Hydrostatic Drive		
Driving System	Driving Steering	4x4		
	Mode	2ws, Crab Steer, 4ws		
	Tires	445/65- 22.5P R - TL		
Tank Capacity	Fuel Tank Capacity	280L	61.59gal	
	Hydraulic Oil Capacity	300L	65.99gal	
Key parts Configuration	Engine	Cummins		
	Axle	Carraro		
	Hydraulic pump	Hengli/Inline		
	Hydraulic System	Husco		
	Cab	Closed, AC, LED lights		
	Attachment	121.92cm Fork	48in Fork	