

Telehandler

MVHT30.32

MVHT13510




Working height Load capacity
31.5ft - 29765lbs
10m - 13500kg

MAVERICK
 310 Edgewood Lane Cleburne Texas 76031


+1 786.340.6550
www.maverickmth.com

Load Chart

Machine on tires with forks LC 600 mm Metric

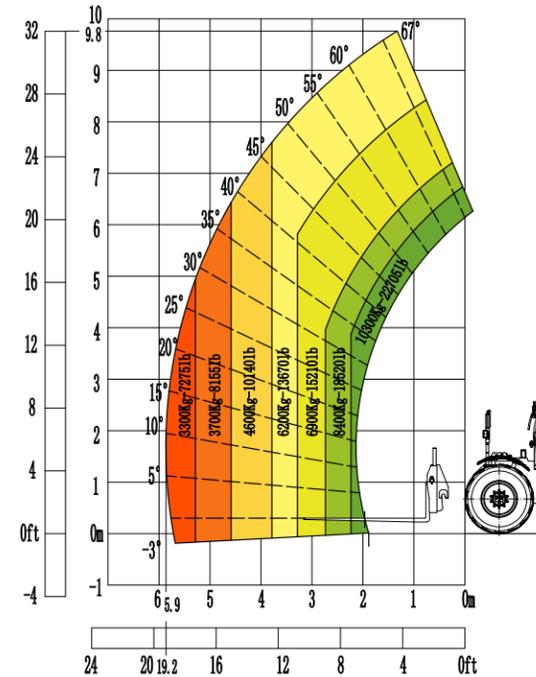

Machine on tires with forks LC 1200 mm Metric

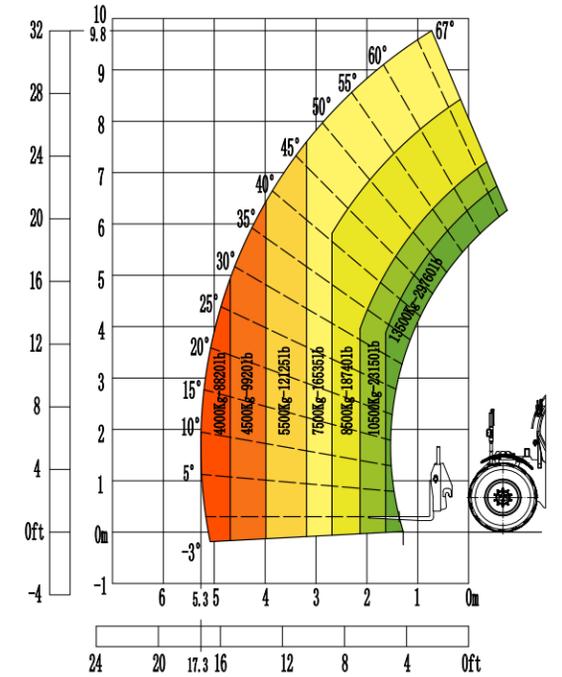

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	29,765lb	13,500kg
	Max. Lift Height	31.5ft	9,600mm
	Length (/with fork)	19.52/24.28ft	5,950/7,400mm
	Width	8.2ft	2,500mm
	Height	9.68ft	2,950mm
	Reach at Max Height	1.97ft	600mm
	Max. Forward Reach	17.06ft	5,200mm
	Operational Weight	45,360lb	20,575kg
	Ground Clearance	1.48ft	450mm
	Turning radius(outside)	17.06ft	5,200mm
Power System	Drive Speed	18.64mph	30km/h
	Gradeability(laden)	35%	
	Power Source	Cummins F 3.8	
Transmission System	Emission Norm	Euro V	
	Rated power	173hp	129kW
	Max. Torque	457lb.ft/1,500rpm	620Nm/1,500rpm
Tank Capacity	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
	Steering Mode	2ws, Crab Steer, 4ws	
Fuel Tank Capacity	Tires	17.5-25	
	Fuel Tank Capacity	61.59gal	280L
Hydraulic Tank Capacity	Fuel Tank Capacity	61.59gal	280L
	Hydraulic Tank Capacity	65.99gal	300L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

