

Telehandler

MVT13.27

MVT6008




Working height Load capacity
27.3ft - 13230lbs
8.3m - 6000kg

MAVERICK
 310 Edgewood Lane Cleburne Texas 76031

+1 786. 340. 6550
www.maverickmth.com

Load Chart

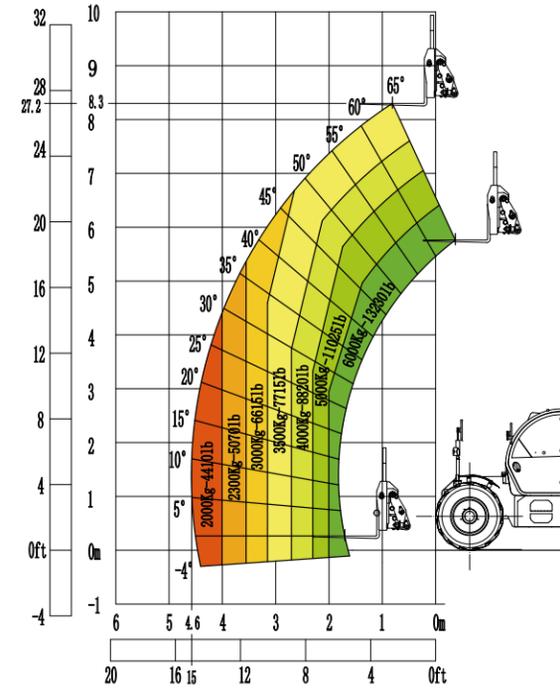

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	13,230lb	6,000kg
	Max. Lift Height	27.3ft	8,300mm
	Length (with fork)	19.19/23.75ft	5,850/7,240mm
	Width	8.07ft	2,460mm
	Height	8.53ft	2,600mm
	Reach at Max Height	2.53ft	770mm
	Max. Forward Reach	14.76ft	4,500mm
	Operational Weight	25,850lb	11,725kg
	Ground Clearance	1.41ft	430mm
	Turning radius(outside)	13.78ft	4,200mm
Power System	Drive Speed	24.85mph	40km/h
	Gradeability(laden)	50%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	121hp	90kW
	Max. Torque	369lb.ft/1,500rpm	500Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
Tank Capacity	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	15.5-25	
	Fuel Tank Capacity	33gal	150L
	Hydraulic Tank Capacity	39.59gal	180L

Application & Configuration

- Engineered for farm operations with better maneuverability.



Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

