

Telehandler

MVT12.58

MVT5518




Working height Load capacity
58ft - 12120lbs
17.6m - 5500kg

MAVERICK
 310 Edgewood Lane Cleburne Texas 76031


+1 786.340.6550
www.maverickmth.com

Load Chart

Outrigger Up

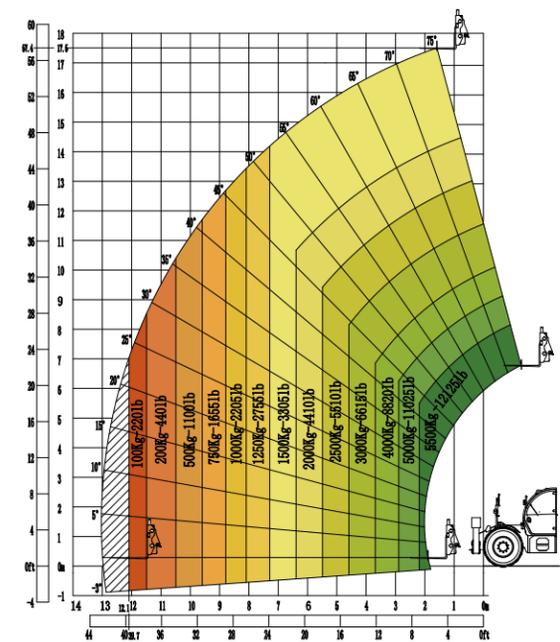

Outrigger Down

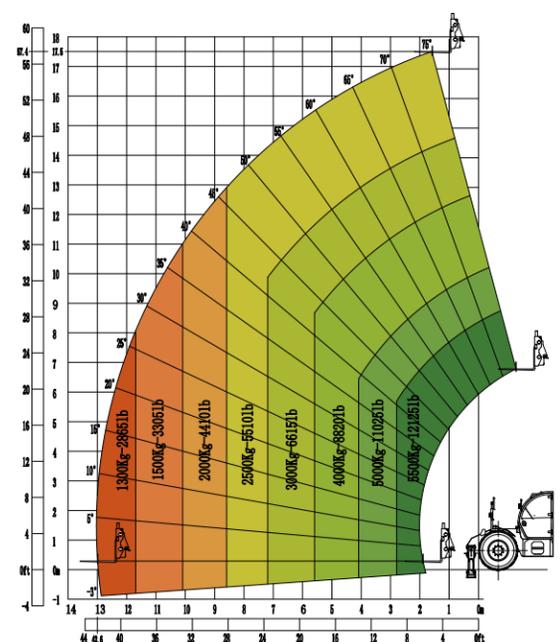

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	12,120lb	5,500kg
	Max. Lift Height	58ft	17,600mm
	Length(/with fork)	20.87/25.49ft	6,360/7,770mm
	Width	8.23ft	2,510mm
	Height	8.69ft	2,650mm
	Reach at Max Height	4.79ft	1,460mm
	Max. Forward Reach	43.98ft	13,100mm
	Operational Weight	32,860lb	14,905kg
	Ground Clearance	1.48ft	450mm
	Turning radius(outside)	14.11ft	4,300mm
Power System	Drive Speed	21.75mph	35km/h
	Gradeability(laden)	45%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	134hp	100kW
	Max. Torque	406lb-ft/1,500rpm	550Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
Tank Capacity	Driving	4x4	
	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	17.5-25	
Fuel Tank Capacity	Fuel Tank Capacity	33gal	150L
	Hydraulic Tank Capacity	39.59gal	180L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

