

Telehandler

MVT8.24

MVT3507




Working height Load capacity
23.5ft - 7720lbs
7.15m - 3500kg

MAVERICK

310 Edgewood Lane Cleburne Texas 76031

+1 786.340.6550
www.maverickmth.com

Load Chart

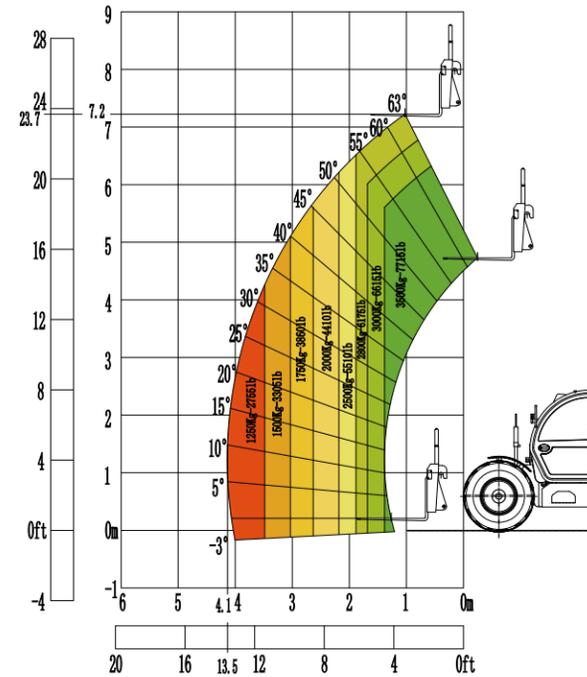

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	7,720lb	3,500kg
	Max. Lift Height	23.5ft	7,150mm
	Length (/with fork)	16.65/21.21ft	5,075/6,465mm
	Width	7.55ft	2,300mm
	Height	8.1ft	2,470mm
	Reach at Max Height	3.12ft	950mm
	Max. Forward Reach	13.62ft	4,150mm
	Operational Weight	19,215lb	8,715kg
	Ground Clearance	1.31ft	400mm
	Turning radius(outside)	12.47ft	3,800mm
Power System	Drive Speed	24.85mph	40km/h
	Gradeability(laden)	55%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	121hp	90kW
	Max. Torque	369lb.ft/1,500rpm	500Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
Tank Capacity	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	405/70-24	
	Fuel Tank Capacity	26.4gal	120L
	Hydraulic Tank Capacity	33gal	150L

Application & Configuration

- Engineered for farm operations with better maneuverability.



Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

