Telehandler

MVT7.22
MVT3007

Working height **Load capacity**

22ft - 7055lbs

6.7m - 3200kg

MAVERICK
310 Edgewood Lane Cleburne Texas 76031

+1 786.340.6550
www.maverickmth.com

Load Chart

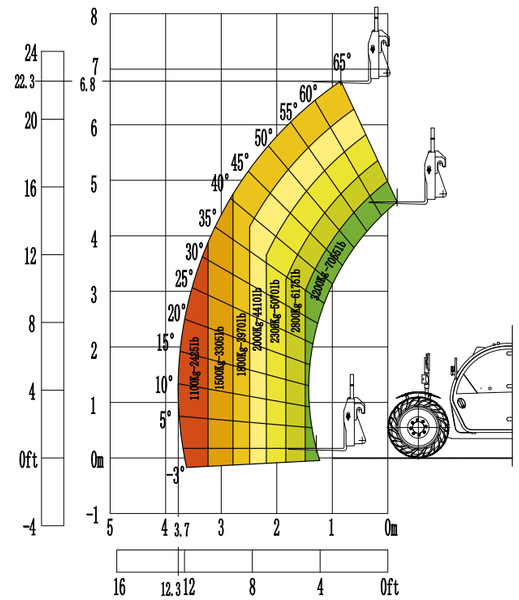

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	7,055lb	3,200kg
	Max. Lift Height	22ft	6,700mm
	Length(/with fork)	15.53/19.42ft	4,735/5,920mm
	Width	6.89ft	2,100mm
	Height	6.73ft	2,050mm
	Reach at Max Height	1.97ft	600mm
	Max. Forward Reach	12.07ft	3,680mm
	Operational Weight	14,495lb	6,575kg
	Ground Clearance	1.08ft	330mm
	Turning radius(outside)	12.47ft	3,800mm
	Drive Speed	18.64mph	30km/h
	Gradeability(laden)	45%	
Power System	Power Source	Kubota	
	Emission Norm	Euro V	
	Rated power	70.5hp	52.6kW
	Max. Torque	210lb.ft/1,500rpm	285Nm/1,500rpm
Transmission System	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	400/70R20	
Tank Capacity	Fuel Tank Capacity	22gal	100L
	Hydraulic Tank Capacity	19.8gal	90L

Application & Configuration

Various replaceable attachment

- Installation of attachment adopts quick change mode,which can quickly switch attachments to achieve the operation requirement of different functions.