

Telehandler

MVT4010





10m 4000kg
Working height Load capacity

MAVERICK
7200 White
St. Fort Worth TX 76135
United States

+1 786.340.6550
www.maverickmth.com

Load Chart

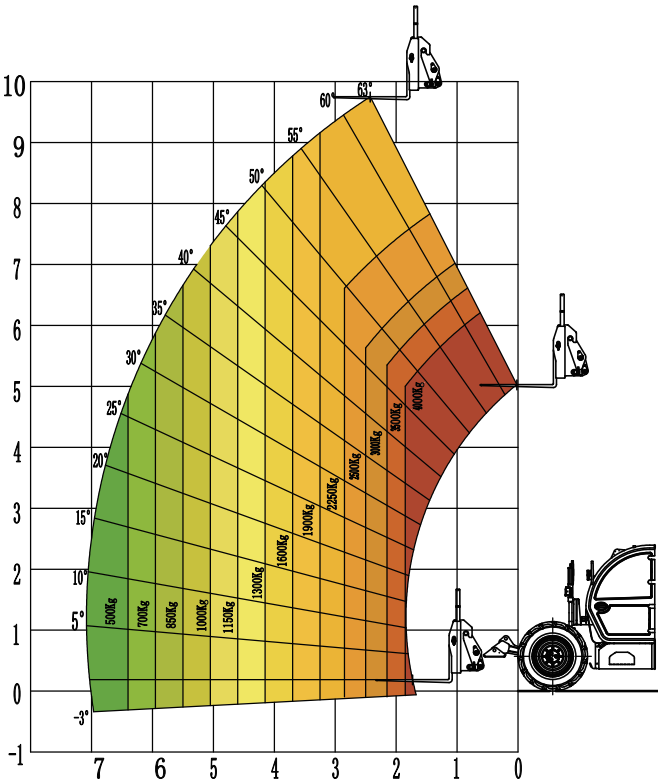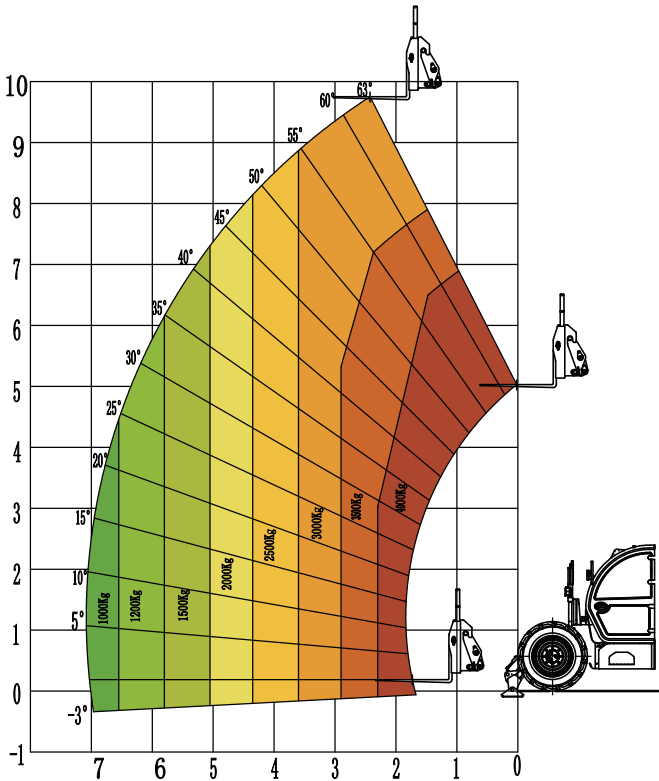

Machine Parameters

System	Measurements	Metric
Machine Parameters	Max. Lift Capacity	4000kg
	Max. Lift Height	9650mm
	Max. Outreach at Max Height	2320mm
	Max. Working Distance	7020mm
	Weight	8580kg
	Ground Clearance	400mm
	Min. Turning radius	3800mm
	Driving Speed	35km/h
Power System	Gradeability	50%
	Power Source	Cummins F3.8 / QSB3.9
	Emissionstander	Euro V / Stage III
	Rated power	90kW / 93kw
Driving System	Max. Torque	500Nm/1500rpm 480Nm/1300-1600rpm
	Driving mode	Hydrostatic Drive
	Driving	4x4
	Steering Mode	2ws,Crab Steer,4ws
Tank Capacity	Tires	405/70-24-16PR-TL
	Fuel Tank Capacity	120L
	Hydraulic Oil Capacity	150L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quicklys witch attachments to achieve the operation requirements of different functions.

