

Telehandler

MVRT6030

Mining / Construction



Max working height

29.9 m / 98.1 ft

Max capacity

6,000 kg / 13,230 lb

MAVERICK


310 Edgewood Lane Cleburne Texas 76031

+1 786. 340. 6550


www.maverickmth.com

Load Chart

On Tires

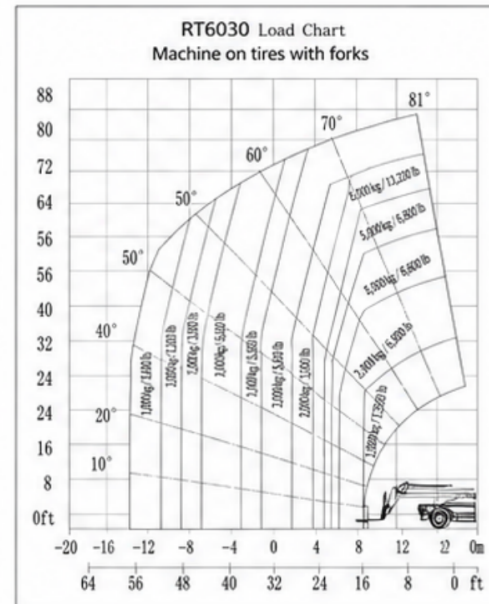

On Outriggers

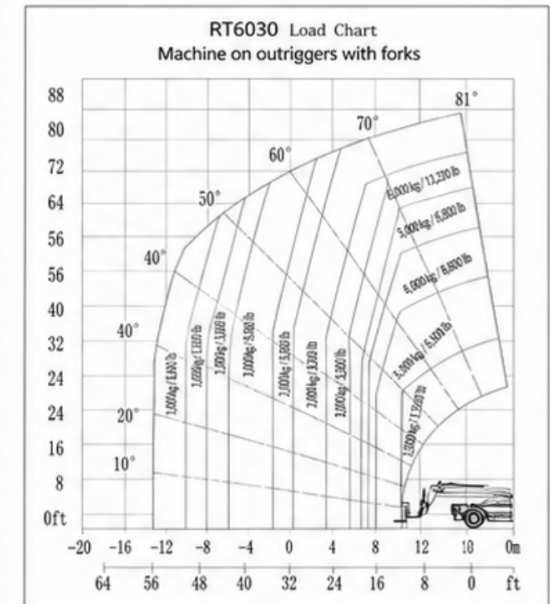

Machine Parameters

System	Imperial	6,000 kg
Max capacity	13,230 lb	
Max working height	98.10 ft	29,900 mm
Length (with fork)	26.77 / 31.36 ft	8,160 / 9,560 mm
Width	8.20 ft	2,500 mm
Height	10.66 ft	3,250 mm
Reach at max height	11.81 ft	3,600 mm
Max. forward reach	84.97 ft	25,900 mm
Operating weight	48,710 lb	22,095 kg
Ground clearance	1.31 ft	400 mm
Turning radius (Outside)	14.76 ft	4,500 mm
Drive speed	21.75 mph	35 km/h
Gradeability (Laden)	35%	35%
Engine	Cummins QSF3.8	Cummins QSF3.8
Emission norm	Euro V / Tier 4 final	Euro V / Tier 4 final
Rated power	173 hp	129 kW
Max. torque	457 lb.ft / 1,500 rpm	620 Nm / 1,500 rpm
Transmission mode	Hydrostatic	Hydrostatic
Driving	4wd	4wd
Steering Mode	2ws / Crab steering / 4ws	2ws / Crab steering / 4ws
Tires	17.5R25	445/65-22.5
Fuel Tank Capacity	61.59 gal	280 L
Hydraulic Tank Capacity	65.99 gal	300 L


Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.



RT6030 Load Chart

Machine on tires with forks

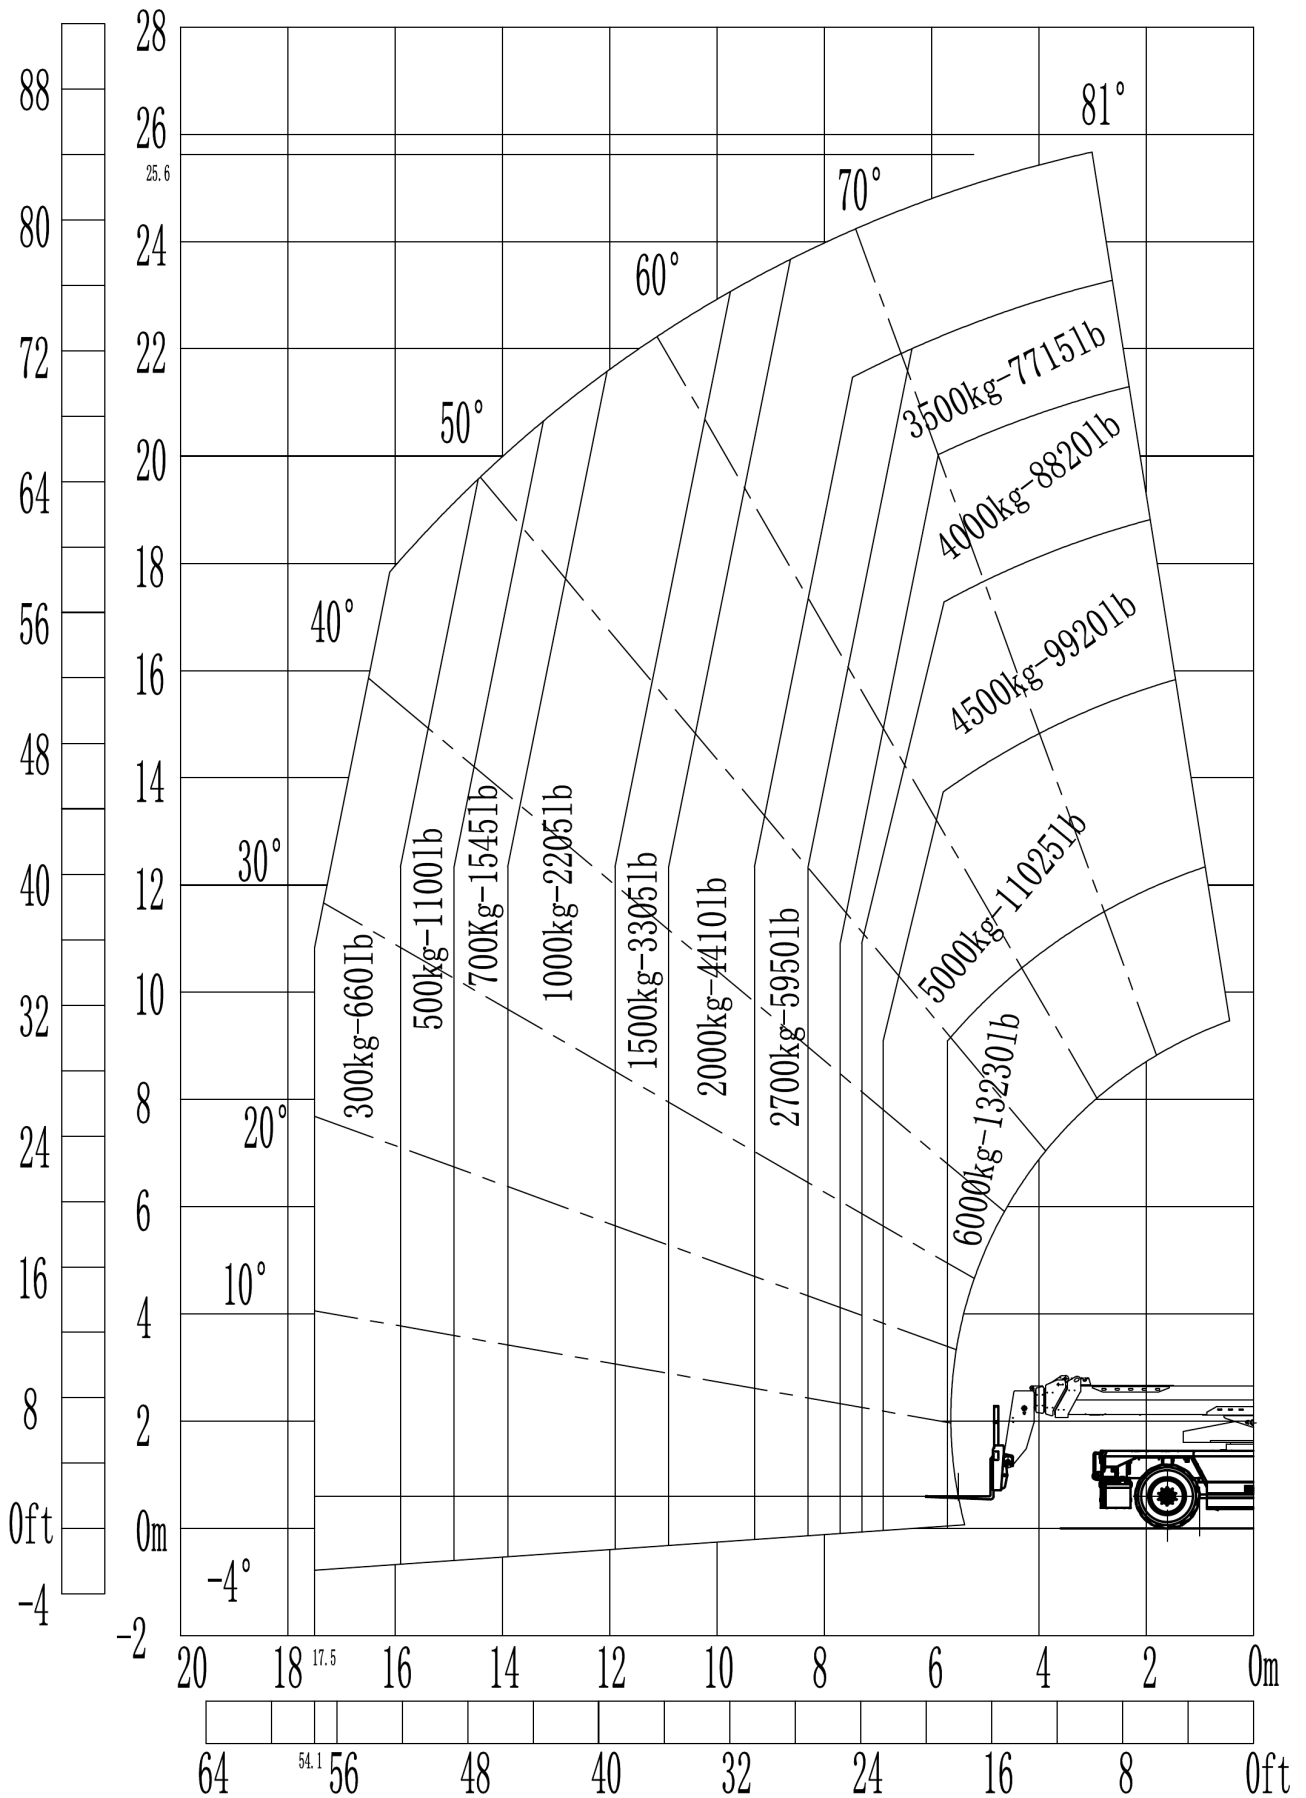

RT6030 Load Chart
Machine on outriggers with forks

