

Telehandler

MVT25.6
MVT5519

6 m (19 ft)

Lift height

2,500 kg (5,510 lb)

Load capacity




MAVERICK
MATERIAL HANDLING

www.maverickmth.com

sales@maverick-americas.com

310 Edgewood Lane,
Cleburne, Texas 76031 - USA

Load Chart

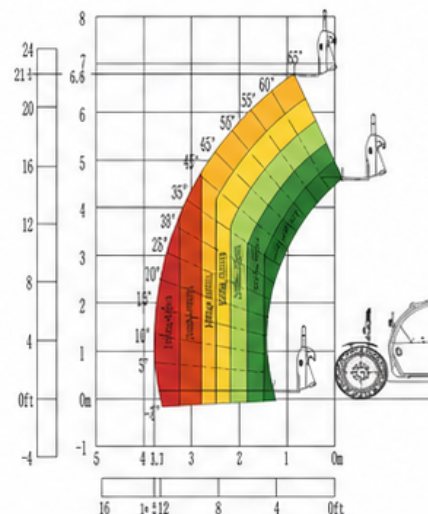

Machine Parameters

System	Measurements	Metric	Imperial
Machine Parameters	Max. Lift Capacity	2,500 kg	5,510 lb
	Max. Lift Height	5,850 mm	19.20 ft
	Length (with fork)	3,965 / 5,145 mm	13.0 / 16.90 ft
	Width	1,850 mm	6.05 ft
	Height	1,920 mm	6.3 ft
	Reach at Max Height	650 mm	2.15 ft
	Max. Forward Reach	3,380 mm	11.1 ft
	Operational Weight	4,825 kg	10,640 lb
	Ground Clearance	300 mm	1 ft
	Turning Radius (outside)	3,350 mm	11 ft
Power / Drive System	Drive Speed	30 km/h	18.65 mph
	Gradeability (laden)	50%	50%
	Engine	Cummins	Cummins
	Axles	Carraro	Carraro
	Hydraulic System	Husco Hydrostatic	Husco Hydrostatic
	Transmission Mode	Hydrostatic Drive	Hydrostatic Drive
	Driving	4x4	4x4
	Steering Mode	2WS, Crab Steer, 4WS	2WS, Crab Steer, 4WS
	Cab Options	Closed Cab / Open Cab	Closed Cab / Open Cab
	Tires	12-16.5	12-16.5

MAVERICK



Various interchangeable attachments

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.



Pallet Forks



Bucket



Grapple



Work Platform



Bale Spear