

Telehandler

MVT9.32
MVT4010




Working height Load capacity
32ft - 8820lbs
10m - 4000kg

MAVERICK
310 Edgewood Lane Cleburne Texas 76031

+1 786. 340. 6550
www.maverickmth.com

Load Chart

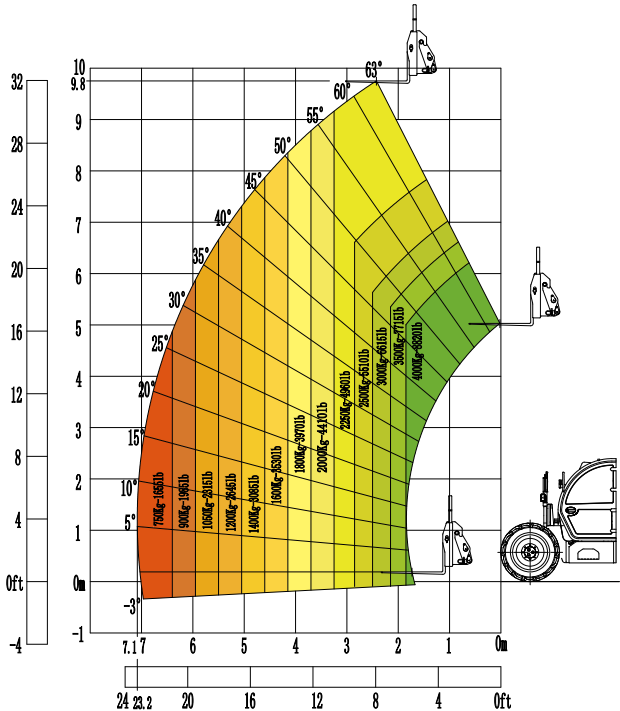

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	8,820lb	4,000kg
	Max. Lift Height	31.7ft	9,650mm
	Length (/with fork)	17.31/21.87ft	5,275/6,665mm
	Width	7.55ft	2,300mm
	Height	8.1ft	2,470mm
	Reach at Max Height	7.61ft	2,320mm
	Max. Forward Reach	23.03ft	7,020mm
	Operational Weight	19,765lb	8,965kg
	Ground Clearance	1.31ft	400mm
	Turning radius(outside)	12.47ft	3,800mm
Power System	Drive Speed	21.75mph	35km/h
	Gradeability(laden)	50%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	121hp	90kW
	Max. Torque	369lb.ft/1,500rpm	500Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
Tank Capacity	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	405/70-24	
	Fuel Tank Capacity	26.4gal	120L
	Hydraulic Tank Capacity	33gal	150L

Construction Application

- Designed for demanding construction sites with enhanced stability and versatility.



Various replaceable attachment

- Installation of attachment adopts quick change mode,which can quickly switch attachments to achieve the operation requirement of different functions.

