

Telehandler

MVRT13.81

MVRT6025



Working height Load capacity
81ft - 13230lbs
24.7m - 6000kg


MAVERICK

310 Edgewood Lane Cleburne Texas 76031


+1 786.340.6550
www.maverickmth.com

Load Chart

Outrigger Up

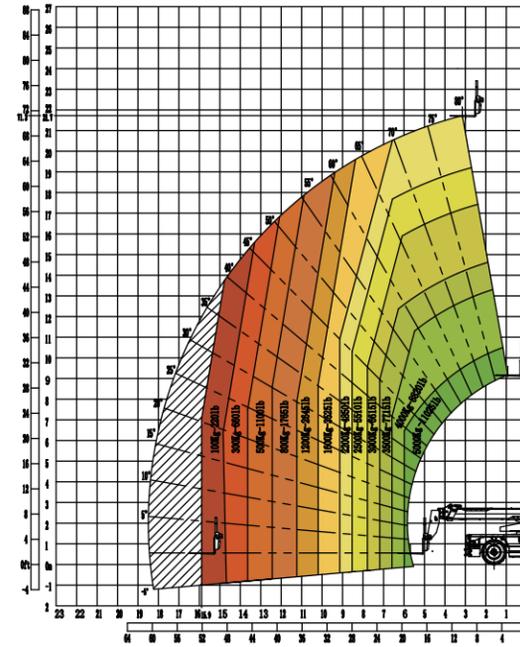

Outrigger Down

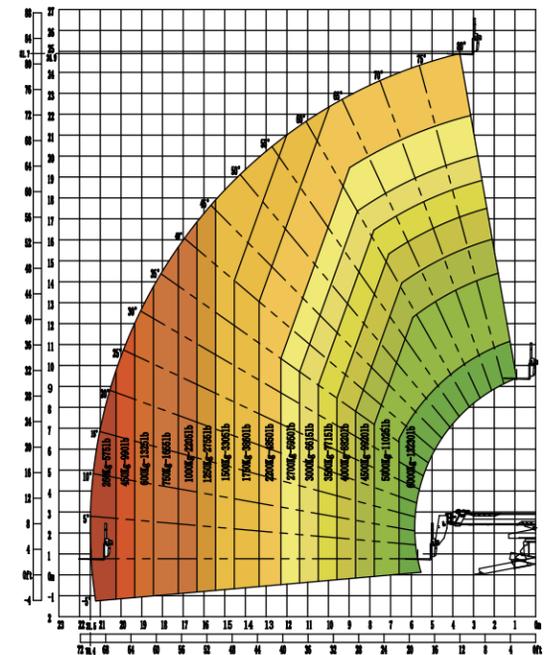

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	13,230lb	6,000kg
	Max. Lift Height	81ft	24,700mm
	Length(/with fork)	26.1/30.71ft	7,955/9,360mm
	Width	8.2ft	2,500mm
	Height	10.33ft	3,150mm
	Reach at Max Height	11.81ft	3,600mm
	Max. Forward Reach	70.21ft	21,400mm
	Operational Weight	44,590lb	20,225kg
	Ground Clearance	1.31ft	400mm
	Turning radius(outside)	14.44ft	4,400mm
Power System	Drive Speed	21.75mph	35km/h
	Gradeability(laden)	35%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	154hp	115kW
	Max. Torque	457lb.ft/1,500rpm	620Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
	Driving	4x4	
Tank Capacity	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	445/65-22.5	
	Fuel Tank Capacity	61.59gal	280L
	Hydraulic Tank Capacity	65.99gal	300L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

