

# Telehandler

# MVRT11.68

# MVRT5021



Working height      Load capacity  
**67.6ft - 11025lbs**  
**20.6m - 5000kg**


## MAVERICK

310 Edgewood Lane Cleburne Texas 76031


+1 786.340.6550  
[www.maverickmth.com](http://www.maverickmth.com)

## Load Chart

Outrigger Up

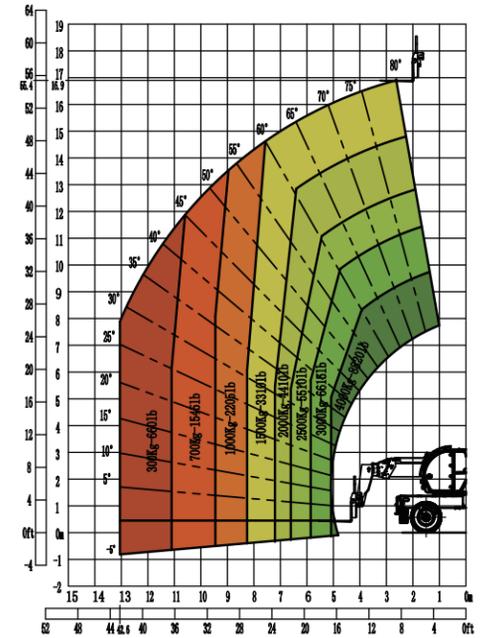

Outrigger Down

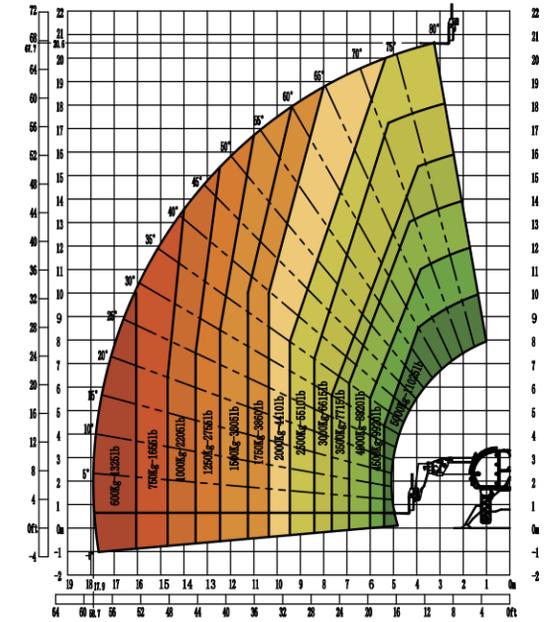

## Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	11,025lb	5,000kg
	Max. Lift Height	67.6ft	20,600mm
	Length(/with fork)	22.15/26.74ft	6,750/8,150mm
	Width	8.2329ft	2,500mm
	Height	8.6942ft	3,100mm
	Reach at Max Height	10.66ft	3,250mm
	Max. Forward Reach	58.4ft	17,800mm
	Operational Weight	38,745lb	17,575kg
	Ground Clearance	1.08ft	330mm
	Turning radius(outside)	13.78ft	4,200mm
Power System	Drive Speed	21.75 mph	35km/h
	Gradeability(laden)		40%
	Power Source		Cummins F 3.8
	Emission Norm		Euro V
Transmission System	Rated power	121hp	90kW
	Max. Torque	369lb-ft/1,500rpm	500Nm/1,500rpm
	Transmission mode		Hydrostatic Drive
Tank Capacity	Driving		4x4
	Steering Mode		2ws, Crab Steer, 4ws
	Tires		17.5-25
Fuel Tank Capacity	Fuel Tank Capacity	33gal	150L
	Hydraulic Tank Capacity	39.59gal	180L

## Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

