

Telehandler

MVT10.45

MVT4514




Working height Load capacity
45ft - 9920lbs
13.7m-4500kg

MAVERICK
 310 Edgewood Lane Cleburne Texas 76031


+1 786. 340. 6550
www.maverickmth.com

Load Chart

Outrigger Up

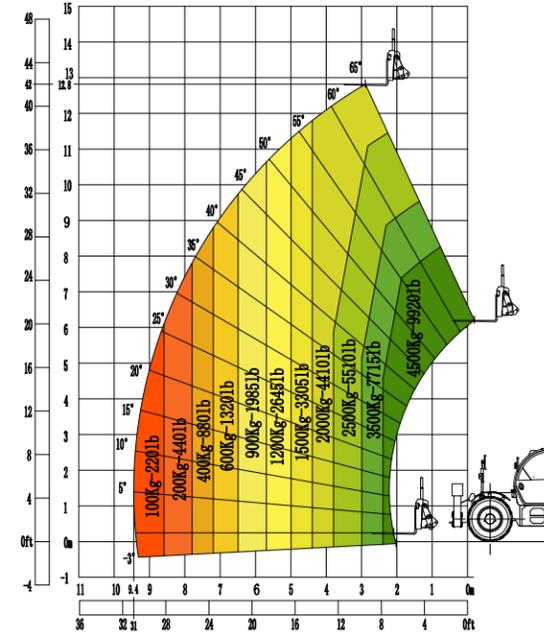

Outrigger Down

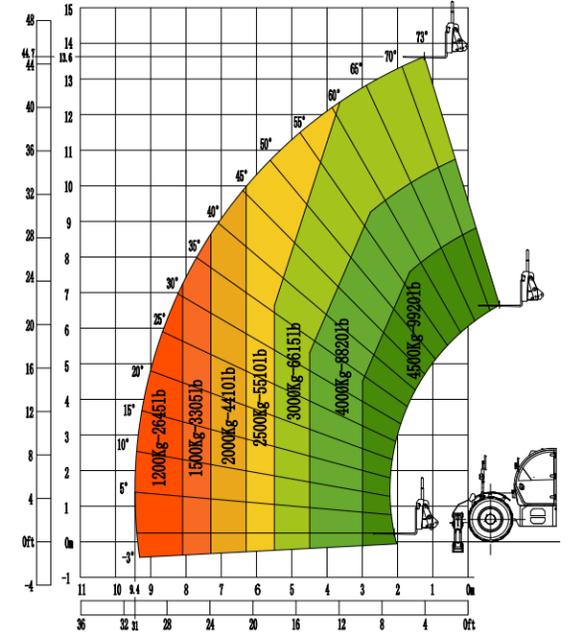

Machine Parameters

System	Measurements	Imperial	Metric
Machine Parameters	Max. Lift Capacity	9,920lb	4,500kg
	Max. Lift Height	45ft	13,700mm
	Length(/with fork)	20.41/24.97ft	6,220/7,610mm
	Width	8.07ft	2,460mm
	Height	8.53ft	2,600mm
	Reach at Max Height	3.77ft	1,150mm
	Max. Forward Reach	30.35ft	9,250mm
	Operational Weight	27,645lb	12,540kg
	Ground Clearance	1.41ft	430mm
	Turning radius(outside)	13.78ft	4,200mm
Power System	Drive Speed	21.75mph	35km/h
	Gradeability(laden)	50%	
	Power Source	Cummins F 3.8	
	Emission Norm	Euro V	
Transmission System	Rated power	121hp	90kW
	Max. Torque	369lb.ft/1,500rpm	500Nm/1,500rpm
	Transmission mode	Hydrostatic Drive	
Tank Capacity	Driving	4x4	
	Steering Mode	2ws, Crab Steer, 4ws	
	Tires	15.5-25	
Fuel Tank Capacity	Fuel Tank Capacity	33gal	150L
	Hydraulic Tank Capacity	39.59gal	180L

Various replaceable attachment

- Installation of attachment adopts quick change mode, which can quickly switch attachments to achieve the operation requirement of different functions.

